

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number  
WO 2005/064933 A1

(51) International Patent Classification<sup>7</sup>:

H04N 5/74

(74) Agents: TRIPOLI, Joseph, S. et al.; 2 Independence Way, Suite #200, Princeton, New Jersey 08540 (US).

(21) International Application Number:

PCT/US2004/043690

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

22 December 2004 (22.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/531,732 22 December 2003 (22.12.2003) US


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: LIGHT MASKING FOR A SEGMENTED DISPLAY SYSTEM

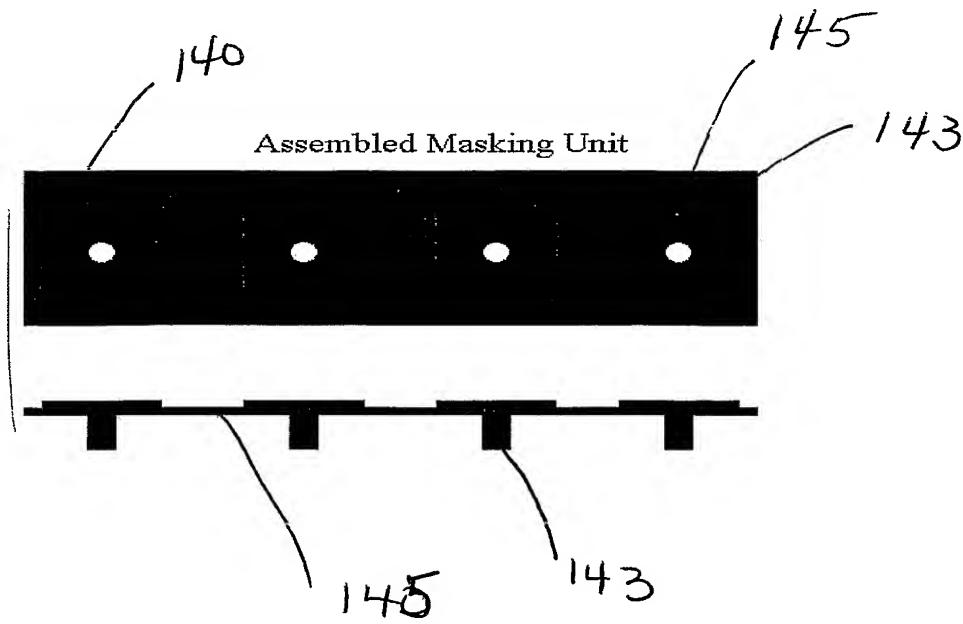

WO 2005/064933 A1

(57) Abstract: A segmented display system in which the display devices are arranged in a  $N \times 1$  array is described.. The segmented display system includes a plurality of projection devices that each project a portion of an image on a corresponding one of the display devices in the  $N \times 1$  array. Distortion from extra light is minimized using a moveable mask around each projection device lens in the  $N \times 1$  array.



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*